


RL254 E/S ENERGY SAVING HIGHBAY

85 W • 105 W



APPLICATIONS

WAREHOUSES

FOUNDRIES

FACTORIES

WORKSHOPS & OTHER
INDUSTRIAL INSTALLATIONS

MOUNTING HEIGHT: 5 - 6 m


- corrosion resistant glass reinforced polyester mounting cup with gland, eyebolt and 3m cord
- 420/520mm anodised aluminium reflector with optional glass cover ■ IP23 open ■ IP43 enclosed
- 16"/22" acrylic diffuser with aluminium adapter - acrylic cover optional

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL254 E 85 CFL	0.6 A	0.38 A	1.56 KG
RL254 E 105 CFL	0.9 A	0.44 A	1.56 KG
RL254 S 85 CFL	0.6 A	0.38 A	1.88 KG
RL254 S 105 CFL	0.9 A	0.44 A	1.88 KG

RL303 CFL FLOODLIGHT

85 CFL ■ 105 CFL

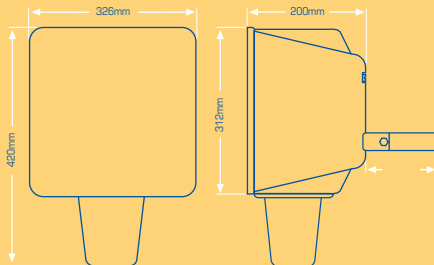

APPLICATIONS

SECURITY
SIGNAGE
WORK AREAS
ILLUMINATION OF BUILDINGS

MOUNTING HEIGHT: 3 - 5 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- high purity aluminium reflector
- universal electroplated galvanised mounting stirrup with pole clamp
- IP55
- colours: white/black

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL303 CFL 85 W	0.6 A	0.38 A	3.5 KG
RL303 CFL 105 W	0.9 A	0.44 A	3.5 KG

RL737 226 FLOODLIGHT

2 x 26 W PL

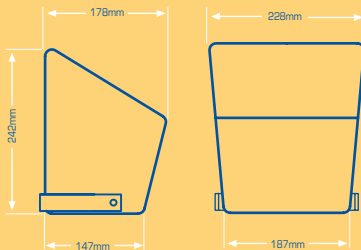

APPLICATIONS

SECURITY
PERIMETERS
SIGNAGE
GARDENS

MOUNTING HEIGHT: 2 - 4 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- wall mount electroplated stirrup
- pole clamp available
- compact
- colours: white/black
- IP55

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL737 226	0.40 A	0.30 A	2.70 KG

RLO45 ENERGY SAVING FLOODLIGHT

13 - 45W E27

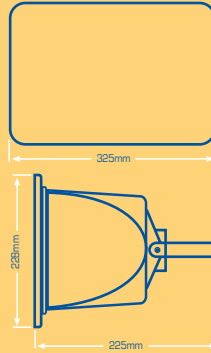

APPLICATIONS

- SECURITY
- PERIMETERS
- SIGNAGE
- GARDENS

MOUNTING HEIGHT: 2 - 3 m


- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- high purity aluminium reflector
- universal electroplated mounting stirrup with pole clamp
- compact
- IP55
- colours: white/black

ORDERING DATA

CODE	WHITE FIBREGLASS FITTING	WEIGHT
	LAMPS	
RLO45 CFL	13W - 45W E27 ENERGY SAVING	2.00 KG

EF ENERGY SAVING FLOODLIGHT

2 X 9 W PL ■ 2 X 13 W PL ■ 2 X 18 W PL

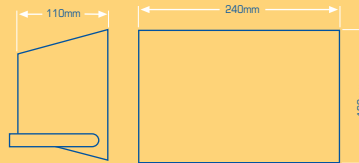

APPLICATIONS

- DOMESTIC
- SECURITY
- SMALL AREAS

MOUNTING HEIGHT: 2 - 3 m


- powder coated cast aluminium housing
- heat tempered glass
- integral control gear
- powder coated mild steel mounting stirrup
- IP55

ORDERING DATA

CODE	LAMP TYPE	RUNNING CURRENT	WEIGHT
EF 209	2 X 9 W PL	0.12 A	2.30 KG
EF 213	2 X 13 W PL	0.16 A	2.30 KG
EF 218	2 X 18 W PL	0.22 A	2.30 KG

RL223 ENERGY SAVING FLOODLIGHT

2 x 23W E27

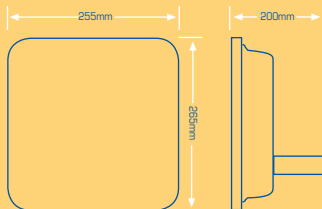

APPLICATIONS

SECURITY
PERIMETERS
SIGNAGE
GARDENS

MOUNTING HEIGHT: 2 - 3 m

- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- high purity aluminium reflector
- wall mount electroplated stirrup
- compact
- IP55
- colours: white/black

ORDERING DATA

CODE	WHITE FIBREGLASS FITTING	WEIGHT
	LAMPS	
RL223 CFL	2 X 23W E27 ENERGY SAVING	1.65 KG