


RFM FLUORESCENT MOISTURE PROOF

1 x 18 W ■ 2 x 18 W ■ 1 x 36 W ■ 2 x 36 W ■ 1 x 58 W ■ 2 x 58 W



APPLICATIONS

CORRIDORS & PASSAGEWAYS
 MOISTURE/CORROSIVE
 ENVIRONMENT
 DUSTY ENVIRONMENT
 CANOPY
 COLD ROOMS
MOUNTING HEIGHT: 2 - 4 m

- GRP base ■ polycarbonate diffuser ■ robust polyamide or stainless steel clips ■ lampholders; roto-lock
- removable powder coated gear plate ■ electromagnetic or electronic control gear ■ IP66 ■ T8 or T5 lamps

ORDERING DATA

| CODE | CORRECTED LINE CURRENT | | WEIGHT |
|---------------------------|------------------------|---------|---------|
| | STARTING | RUNNING | |
| RFM 118 (1 X 18 W) | 0.17 A | 0.13 A | 1.50 KG |
| RFM 218 (2 X 18 W) | 0.29 A | 0.22 A | 2.00 KG |
| RFM 136 (1 X 36 W) | 0.29 A | 0.22 A | 3.00 KG |
| RFM 236 (2 X 36 W) | 0.58 A | 0.44 A | 4.00 KG |
| RFM 158 (1 X 58 W) | 0.42 A | 0.32 A | 3.50 KG |
| RFM 258 (2 X 58 W) | 0.84 A | 0.64 A | 5.00 KG |

SURFACE FLUORESCENT T8/T5

1 x 18 W ■ 2 x 18 W ■ 1 x 36 W ■ 2 x 36 W ■ 1 x 58 W ■ 2 x 58 W



An efficient yet low cost channel type luminaire available for use with bi-pin fluorescent lamps.

- **Body:** Formed sheet steel finish with white epoxy powder coating
- **Lampholders:** Roto-lock or Telescopic type
- **Ballast:** ECG is standard, other options available on request
- **Other:** One piece aluminium wing available

APPLICATIONS


UNDER COVER PARKING
 UNDER COVER WALKWAYS
 OFFICES
 FACTORIES
 DOMESTIC
 WORKSHOPS
MOUNTING HEIGHT: 2 - 4 m

ORDERING DATA

| CODE | LAMP | LENGTH | WIDTH | HEIGHT | FIXING | WEIGHT |
|----------------------|--------|---------|-------|--------|---------|---------|
| PSG- 118 -ECG | 1 x 18 | 620 mm | 70 mm | 45 mm | 435 mm | 1.20 KG |
| PSG- 136 -ECG | 1 x 36 | 1230 mm | 70 mm | 45 mm | 1020 mm | 2.00 KG |
| PSG- 158 -ECG | 1 x 58 | 1530 mm | 70 mm | 45 mm | 1320 mm | 2.50 KG |
| PSG- 218 -ECG | 2 x 18 | 620 mm | 70 mm | 45 mm | 435 mm | 1.30 KG |
| PSG- 236 -ECG | 2 x 36 | 1230 mm | 70 mm | 45 mm | 1020 mm | 2.00 KG |
| PSG- 258 -ECG | 2 x 58 | 1530 mm | 70 mm | 45 mm | 1320 mm | 2.50 KG |

RECESSED FLUORESCENT T8 / T5

WITH PRISMATIC DIFFUSER

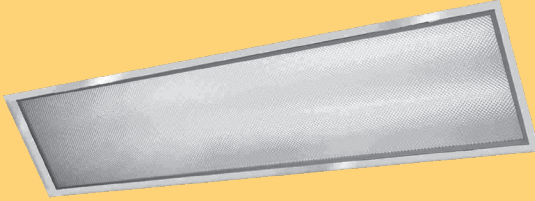

An efficient, simple to install lay-in modular luminaire designed for use in exposed T suspended ceilings.


- **Body:** Form sheet steel white epoxy powder coating
- **Diffuser:** Prismatic
- **Maintenance:** Shift and drop
- **Ballast:** ECG is standard, other options available on request

ORDERING DATA

| CODE | LAMP | CEILING MODULAR | HEIGHT | WEIGHT |
|-------------|--------|-----------------|--------|---------|
| LLB-318-ECG | 3 x 18 | 600 x 600 mm | 90 mm | 4.00 KG |
| LLB-418-ECG | 3 x 18 | 600 x 600 mm | 90 mm | 4.50 KG |
| LLB-336-ECG | 3 x 36 | 1200 x 600 mm | 90 mm | 6.50 KG |
| LLB-436-ECG | 4 x 36 | 1200 x 600 mm | 90 mm | 6.50 KG |

RECESSED FLUORESCENT T8 / T5

WITH LOW BRIGHTNESS LOUVRE

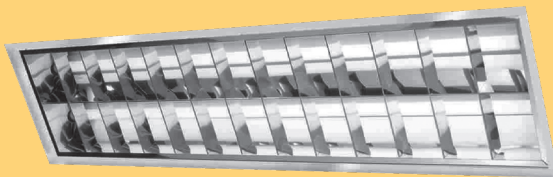

An efficient, simple to install lay-in modular luminaire designed for use in exposed T suspended ceilings. Low brightness louvres are fitted for effective light and glare control.

- **Body:** Form sheet steel white epoxy powder coating
- **Diffuser:** High grade lay-in and clip-in anodised aluminium low brightness louvres
- **Maintenance:** "Lift and shift: or "pull and unclip" action allows for easy access to lamps
- **Ballast:** ECG is standard, other options available on request

ORDERING DATA

| CODE | LAMP | CEILING MODULAR | HEIGHT | WEIGHT |
|-------------|--------|-----------------|--------|---------|
| LLB-318-ECG | 3 x 18 | 600 x 600 mm | 90 mm | 4.00 KG |
| LLB-418-ECG | 3 x 18 | 600 x 600 mm | 90 mm | 4.50 KG |
| LLB-336-ECG | 3 x 36 | 1200 x 600 mm | 90 mm | 6.50 KG |
| LLB-436-ECG | 4 x 36 | 1200 x 600 mm | 90 mm | 6.50 KG |

TBAY T5 FLUORESCENT HIGH BAY

4 x 28W ■ 4 x 54W ■ 4 x 49W ■ 4 x 80W



A highly efficient, alternative to regular high bays, where aesthetics and maximum light output and low energy usage is required.

- **Body:** Formed sheet steel, finished with epoxy powder coating.
- **Lampholder:** Roto-lock for easy lamp replacement.
- **Ballast:** Electronic ballast for lamps are standard
- High purity aluminium reflector designed for maximum light output
- Surface mounted or suspended
- Suitable for High level mounting or other options

ORDERING DATA

| CODE | LAMP | LENGTH | WIDTH | HEIGHT | WEIGHT |
|--------------|--------|---------|--------|--------|---------|
| TBAY-454-ECG | 4 x 54 | 1224 mm | 254 mm | 91mm | 8.00 KG |
| TBAY-480-ECG | 4 x 80 | 1524 mm | 254 mm | 91mm | 8.00 KG |