


RECESSED FLUORESCENT T8 / T5

WITH LOW BRIGHTNESS LOUVRE

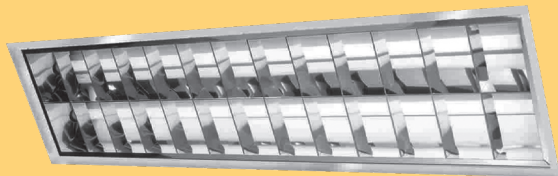

An efficient, simple to install lay-in modular luminaire designed for use in exposed T suspended ceilings. Low brightness louvres are fitted for effective light and glare control.

- **Body:** Form sheet steel white epoxy powder coating
- **Diffuser:** High grade lay-in and clip-in anodised aluminium low brightness louvres
- **Maintenance:** "Lift and shift" or "pull and unclip" action allows for easy access to lamps
- **Ballast:** ECG is standard, other options available on request

ORDERING DATA

CODE	LAMP	CEILING MODULAR	HEIGHT	WEIGHT
LLB-318-ECG	3 x 18	600 x 600 mm	90 mm	4.00 KG
LLB-418-ECG	3 x 18	600 x 600 mm	90 mm	4.50 KG
LLB-336-ECG	3 x 36	1200 x 600 mm	90 mm	6.50 KG
LLB-436-ECG	4 x 36	1200 x 600 mm	90 mm	6.50 KG