


# RL737 226 FLOODLIGHT

2 x 26 W PL

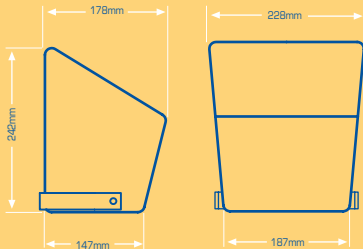

## APPLICATIONS

SECURITY  
PERIMETERS  
SIGNAGE  
GARDENS

**MOUNTING HEIGHT:** 2 - 4 m

- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- wall mount electroplated stirrup
- pole clamp available
- compact
- colours: white/black
- IP65

## ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL737 226	0.40 A	0.30 A	2.70 KG