


Academy Plus

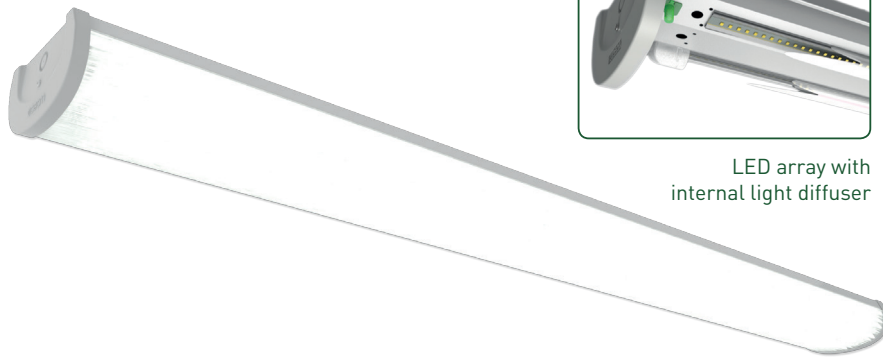

LED array with internal light diffuser

- Ideal replacement for linear fluorescent
- Designed for surface mounting in office and educational environments
- Steel backplate with Polycarbonate diffuser, secured by screwed endcaps
- Uses High Quality Micro-diffuser LED strips
- Supplied in 4000K 'neutral' white colour temperature

LUCECO

The luminaire contains built-in LED lamps.

A

A++
A+
A
B
C
D
E

The lamps cannot be changed in the luminaire.


874/2012

50,000 HOURS

CRI >80

IP20 RATED

WHITE FINISH

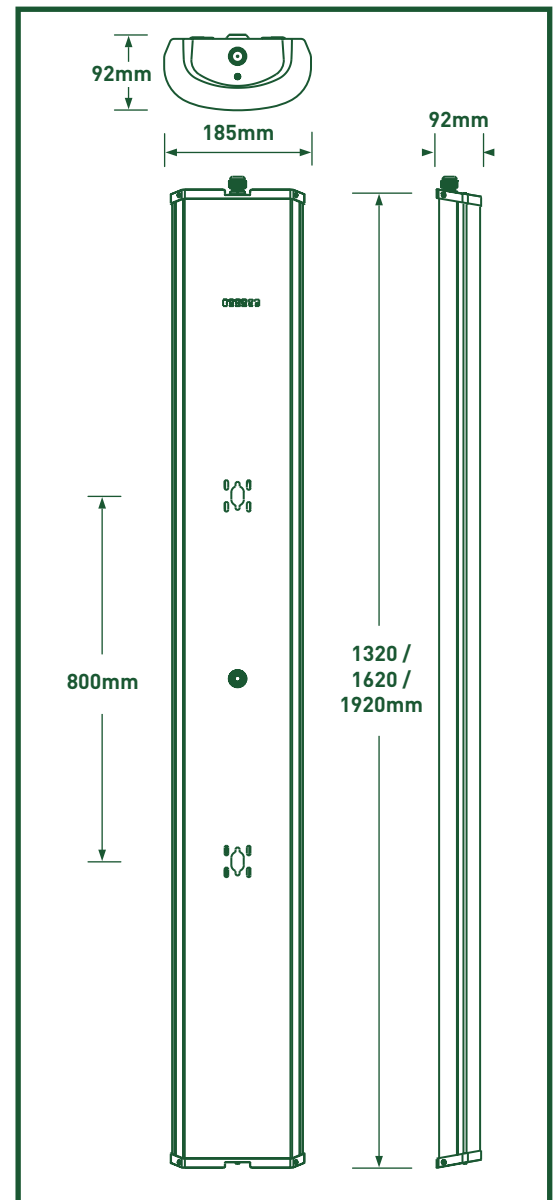

Cat No.	Description	Length	Luminaire Lumens	Wattage	Efficacy lm/W	CCT	Voltage	Barcode
LAC12W22S40	Standard driver	1320mm	2200	24W	92	4000K	230V	5015056535241
LAC12W22E40	Emergency version	1320mm	2200	24W	92	4000K	230V	5015056535258
LAC15W34S40	Standard driver	1620mm	3400	34W	100	4000K	230V	5015056535265
LAC15W34E40	Emergency version	1620mm	3400	34W	100	4000K	230V	5015056535272
LAC18W44S40	Standard driver	1920mm	4400	46W	96	4000K	230V	5015056535289
LAC18W44E40	Emergency version	1920mm	4400	46W	96	4000K	230V	5015056535296

Standards		▶ Continued
EN 60598-1	Luminaires - General requirements	EN 61547
EN 60598-2-2	Luminaires - Recessed	EN 61000-3-2
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements	EN 62471
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules	2002/96/EC
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment	2011/65/EU
		(EC) No 1907/2006

Tech Help Line
 UK - **0845 194 7584**
 Non UK - **+44 (0)1952 238 100**

Supplied by
 BG Electrical Ltd
 Stafford Park 1 TF3 3BD ENGLAND

Visit our website at
www.luceco.uk

Cat No.	Description	Length	Luminaire Lumens	Wattage	Efficacy lm/W	CCT	Voltage	Barcode
Twin LED array								
LAC12W44S40	Standard driver	1320mm	4400	45W	98	4000K	230V	5015056535302
LAC12W44E40	Emergency version	1320mm	4400	45W	98	4000K	230V	5015056535319
LAC15W66S40	Standard driver	1620mm	6600	67W	99	4000K	230V	5015056535326
LAC15W66E40	Emergency version	1620mm	6600	67W	99	4000K	230V	5015056535333
LAC18W87S40	Standard driver	1920mm	8700	92W	95	4000K	230V	5015056535340
LAC18W87E40	Emergency version	1920mm	8700	92W	95	4000K	230V	5015056535357

Single LED array with microwave sensor

LAC12W22S40MW	Standard driver	1320mm	2200	24W	92	4000K	230V	5015056535364
LAC12W22E40MW	Emergency version	1320mm	2200	24W	92	4000K	230V	5015056535371
LAC15W34S40MW	Standard driver	1620mm	3400	34W	100	4000K	230V	5015056535388
LAC15W34E40MW	Emergency version	1620mm	3400	34W	100	4000K	230V	5015056535395
LAC18W44S40MW	Standard driver	1920mm	4400	46W	96	4000K	230V	5015056535401
LAC18W44E40MW	Emergency version	1920mm	4400	46W	96	4000K	230V	5015056535418

Twin with microwave

LAC12W44S40MW	Standard driver	1320mm	4400	45W	98	4000K	230V	5015056535425
LAC12W44E40MW	Emergency version	1320mm	4400	45W	98	4000K	230V	5015056535432
LAC15W66S40MW	Standard driver	1620mm	6600	67W	99	4000K	230V	5015056535449
LAC15W66E40MW	Emergency version	1620mm	6600	67W	99	4000K	230V	5015056535456
LAC18W87S40MW	Standard driver	1920mm	8700	92W	95	4000K	230V	5015056535463
LAC18W87E40MW	Emergency version	1920mm	8700	92W	95	4000K	230V	5015056535470

Single with DALI driver

LAC12W22D40	DALI driver	1320mm	2200	24W	92	4000K	230V	5015056535487
LAC12W22ED40	Emergency version	1320mm	2200	24W	92	4000K	230V	5015056535494
LAC15W34D40	DALI driver	1620mm	3400	34W	100	4000K	230V	5015056535500
LAC15W34ED40	Emergency version	1620mm	3400	34W	100	4000K	230V	5015056535517
LAC18W44D40	DALI driver	1920mm	4400	46W	96	4000K	230V	5015056535524
LAC18W44ED40	Emergency version	1920mm	4400	46W	96	4000K	230V	5015056535531

Twin with DALI driver

LAC12W44D40	DALI driver	1320mm	4400	45W	98	4000K	230V	5015056535548
LAC12W44ED40	Emergency version	1320mm	4400	45W	98	4000K	230V	5015056535555
LAC15W66D40	DALI driver	1620mm	6600	67W	99	4000K	230V	5015056535562
LAC15W66ED40	Emergency version	1620mm	6600	67W	99	4000K	230V	5015056535579
LAC18W87D40	DALI driver	1920mm	8700	92W	95	4000K	230V	5015056535586
LAC18W87ED40	Emergency version	1920mm	8700	92W	95	4000K	230V	5015056535593

All Academy products are supplied with 4000K LED's as standard, other colour temperatures are available to order, subject to minimum order requirement

Tech Help Line
UK - **0845 194 7584**
Non UK - **+44 (0)1952 238 100**

Supplied by
BG Electrical Ltd
Stafford Park 1 TF3 3BD ENGLAND

Visit our website at
www.luceco.uk