

Climate



Twin

- Fitted with LED tubes, ideal replacement for linear fluorescent
- Designed for surface mount applications in industrial environments
- Polycarbonate body and diffuser

LUCECO

The luminaire contains built-in LED lamps.

A

A++
A+
A
B
C
D
E

The lamps cannot be changed in the luminaire.


874/2012



RoHS



3 years standard guarantee and 1 year onsite warranty available in the UK. Rest of the world may vary, please ask your local distributor for more information.

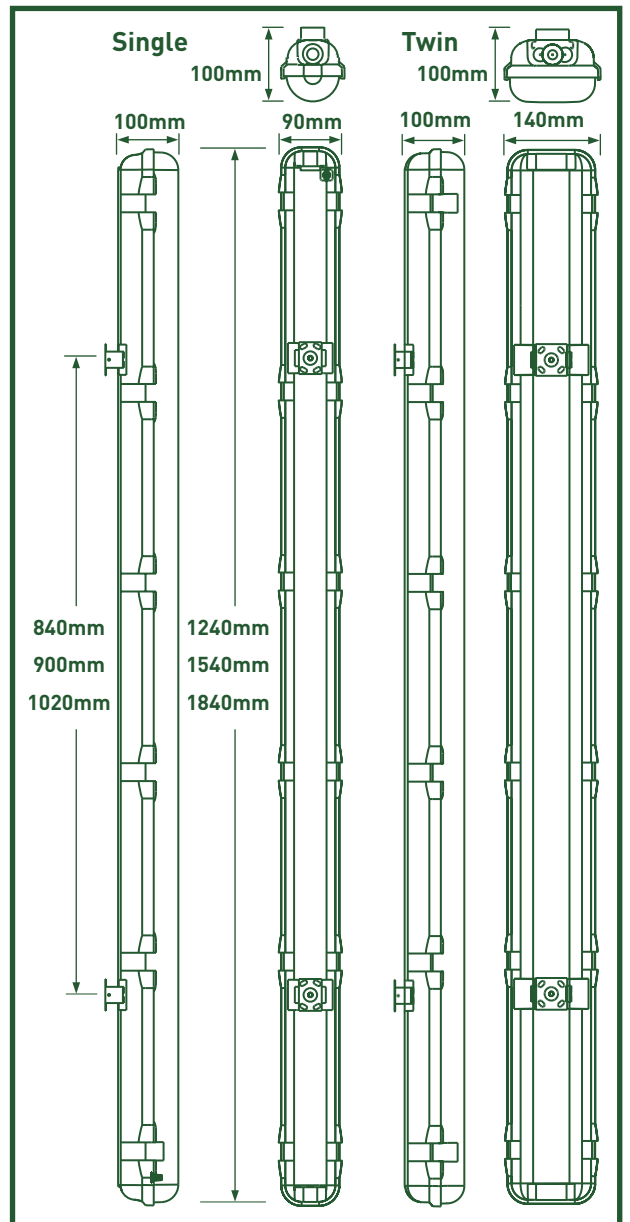

Cat No.	Description	Length	Luminaire Lumens	Wattage	Efficacy Llm/W	CCT	Voltage	Barcode
LCLT12W21S40	Standard driver	1240mm	2160	24W	90	4000K	230V	5015056535968
LCLT12W21E40	Emergency driver	1240mm	2160	24W	90	4000K	230V	5015056535975
LCLT15W28S40	Standard driver	1540mm	2880	32W	90	4000K	230V	5015056535982
LCLT15W28E40	Emergency driver	1540mm	2880	32W	90	4000K	230V	5015056535999
LCLT18W35S40	Standard driver	1840mm	3580	40W	90	4000K	230V	5015056536002
LCLT18W35E40	Emergency driver	1840mm	3580	40W	90	4000K	230V	5015056536019

▼ Continued

Tech Help Line
UK - **0845 194 7584**
Non UK - **+44 (0)1952 238 100**

Supplied by
BG Electrical Ltd
Stafford Park 1 TF3 3BD ENGLAND

Visit our website at
www.luceco.uk

Cat No.	Description	Length	Luminaire Lumens	Wattage	Efficacy lm/W	CCT	Voltage	Barcode
Twin LED tubes								
LCLT12W43S40	Standard driver	1240mm	4320	48W	90	4000K	230V	5015056536026
LCLT12W43E40	Emergency driver	1240mm	4320	48W	90	4000K	230V	5015056536033
LCLT15W57S40	Standard driver	1540mm	5760	64W	90	4000K	230V	5015056536040
LCLT15W57E40	Emergency driver	1540mm	5760	64W	90	4000K	230V	5015056536057
LCLT18W71S40	Standard driver	1840mm	7160	80W	90	4000K	230V	5015056536064
LCLT18W71E40	Emergency driver	1840mm	7160	80W	90	4000K	230V	5015056536071

All climate products are supplied with 4000K LED's as standard, other colour temperatures are available to order.

Mounting bracket, gland kit and screws include for installation.

Standards

EN 60598-1	Luminaires - General requirements	EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 60598-2-2	Luminaires - Recessed	EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements	EN 62471	Photobiological safety of lamps and lamp systems
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules	2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment	2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
		(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

Tech Help Line

UK - **0845 194 7584**

Non UK - **+44 (0)1952 238 100**

Supplied by

BG Electrical Ltd

Stafford Park 1 TF3 3BD ENGLAND

Visit our website at

www.luceco.uk