

Climate Plus



Single



LEDs (Twin)

- Complete with LED array, ideal replacement for linear fluorescent
- Designed for surface mount application in industrial and commercial environments
- Polycarbonate body and diffuser with stainless steel anti-tamper clips

LUCECO

The luminaire contains built-in LED lamps.

A++

A+

A

B

C

D

E

A

The lamps cannot be changed in the luminaire.

874/2012

3 year

Standard

GUARANTEE

1 year

on site


WARRANTY

3 years standard guarantee and 1 year onsite warranty available in the UK. Rest of the world may vary, please ask your local distributor for more information.



LPC3BSP65 - Batten mount PIR presence detector with lux level sensing, time delay function and infrared override

LPC3BDP65 - Batten mount PIR presence detector with Direct Dim and time delay function (up to 10 ballasts). DALI/DSI

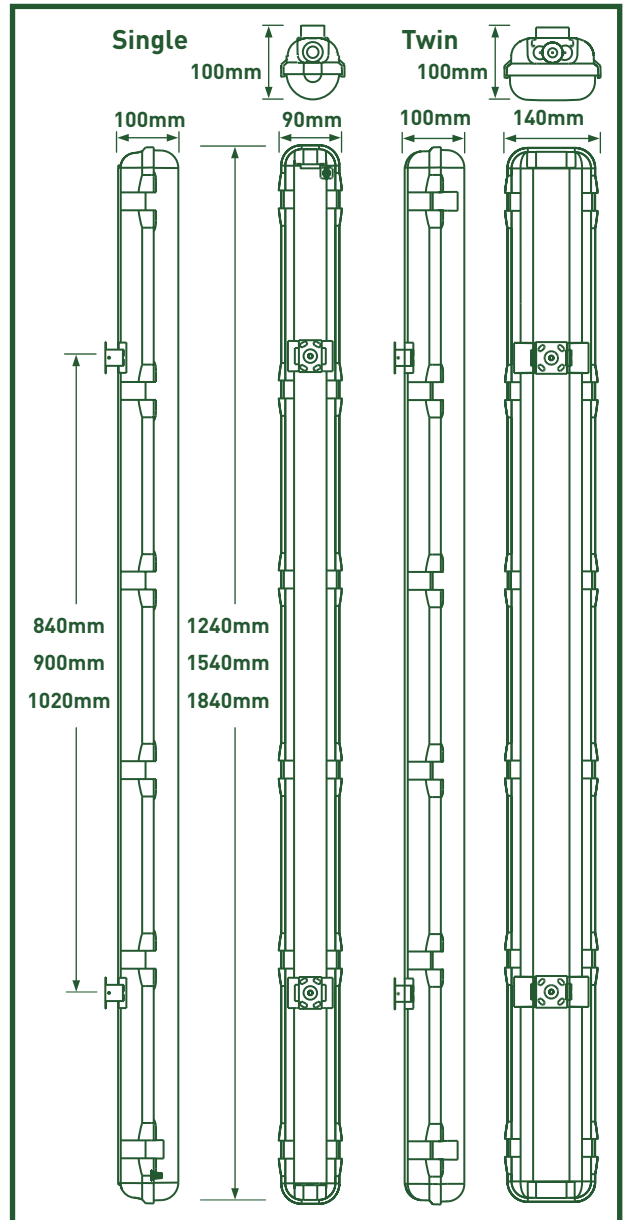

RoHS

Cat No.	Description	Length	Luminaire Lumens	Wattage	Efficacy lm/W	CCT	Voltage	Barcode
LCL12W22S40	Standard driver	1240mm	2200	24W	92	4000K	230V	5015056535722
LCL12W22E40	Emergency driver	1240mm	2200	24W	92	4000K	230V	5015056535739
LCL15W34S40	Standard driver	1540mm	3400	34W	100	4000K	230V	5015056535746
LCL15W34E40	Emergency driver	1540mm	3400	34W	100	4000K	230V	5015056535753
LCL18W44S40	Standard driver	1840mm	4400	46W	96	4000K	230V	5015056535760
LCL18W44E40	Emergency driver	1840mm	4400	46W	96	4000K	230V	5015056535777

▼ Continued

Cat No.	Description	Length	Luminaire Lumens	Wattage	Efficacy lm/W	CCT	Voltage	Barcode
Twin LED array								
LCL12W44S40	Standard driver	1240mm	4400	45W	98	4000K	230V	5015056535784
LCL12W44E40	Emergency driver	1240mm	4400	45W	98	4000K	230V	5015056535791
LCL15W66S40	Standard driver	1540mm	6600	67W	99	4000K	230V	5015056535807
LCL15W66E40	Emergency driver	1540mm	6600	67W	99	4000K	230V	5015056535814
LCL18W87S40	Standard driver	1840mm	8700	92W	95	4000K	230V	5015056535821
LCL18W87E40	Emergency driver	1840mm	8700	92W	95	4000K	230V	5015056535838

Single LED array with DALI driver

LCL12W22D40	DALI driver	1240mm	2200	24W	92	4000K	230V	5015056535845
LCL12W22ED40	Emergency driver	1240mm	2200	24W	92	4000K	230V	5015056535852
LCL15W34D40	DALI driver	1540mm	3400	34W	100	4000K	230V	5015056535869
LCL15W34ED40	Emergency driver	1540mm	3400	34W	100	4000K	230V	5015056535876
LCL18W44D40	DALI driver	1840mm	4400	46W	96	4000K	230V	5015056535883
LCL18W44ED40	Emergency driver	1840mm	4400	46W	96	4000K	230V	5015056535890

Twin LED array with DALI driver

LCL12W44D40	DALI driver	1240mm	4400	45W	98	4000K	230V	5015056535906
LCL12W44ED40	Emergency driver	1240mm	4400	45W	98	4000K	230V	5015056535913
LCL15W66D40	DALI driver	1540mm	6600	67W	99	4000K	230V	5015056535920
LCL15W66ED40	Emergency driver	1540mm	6600	67W	99	4000K	230V	5015056535937
LCL18W87D40	DALI driver	1840mm	8700	92W	95	4000K	230V	5015056535944
LCL18W87ED40	Emergency driver	1840mm	8700	92W	95	4000K	230V	5015056535951

All climate products are supplied with 4000K LED's as standard, other colour temperatures are available to order.

Mounting bracket, gland kit and screws include for installation.

Standards

EN 60598-1	Luminaires - General requirements	EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 60598-2-2	Luminaires - Recessed	EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements	EN 62471	Photobiological safety of lamps and lamp systems
EN 61347-2-13	Lamp controlgear - Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules	2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment	2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
		(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

Tech Help Line
 UK - **0845 194 7584**
 Non UK - **+44 (0)1952 238 100**

Supplied by
 BG Electrical Ltd
 Stafford Park 1 TF3 3BD ENGLAND

Visit our website at
www.luceco.uk