


Suspended pendants

18.5W, 30W, 42W

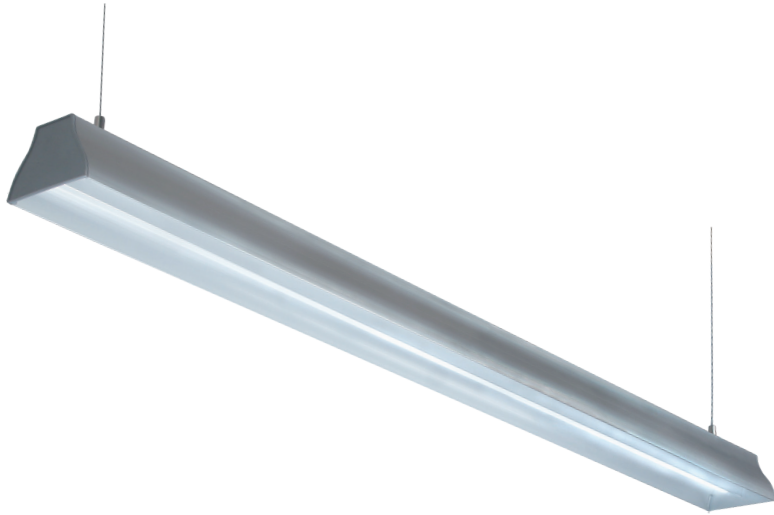

- Anodised aluminium finish
- Suspension cables and transparent feed cable
- Suspension height can be adjusted without tools
- Fixed output constant current driver
- Anti-glare microprismatic surface

[Click here for more information](#)

4000K
NEUTRAL
WHITE

CRI
>80

IP20
RATED


3 year
standard
GUARANTEE

1 year
on site
WARRANTY


3 years standard guarantee and 1 year onsite warranty available in the UK. Rest of the world may vary, please ask your local distributor for more information.

Cat No.	Wattage	Luminaire Lumens	Efficacy Llm/W	Beam Angle	Voltage	Barcode
LKT1012ACW	18.5W	1400	76	103	230V	5015056530253
LKT1012BCW	30W	2000	67	103	230V	5015056530260
LKT1013CW	42W	3100	74	108	230V	5015056530277


LKT1012ACW

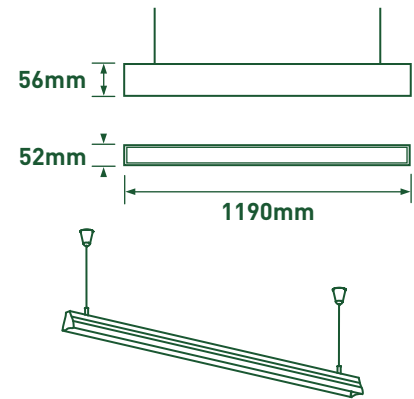

LKT1012BCW

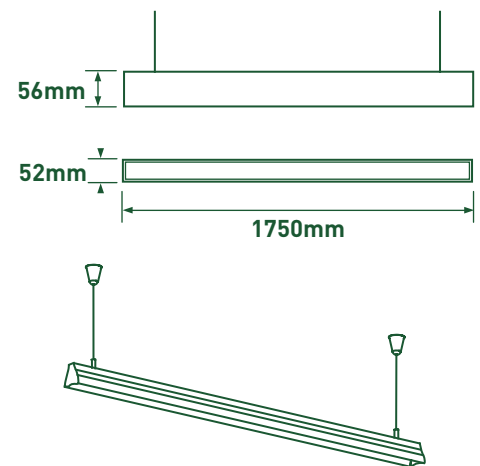

LKT1013CW

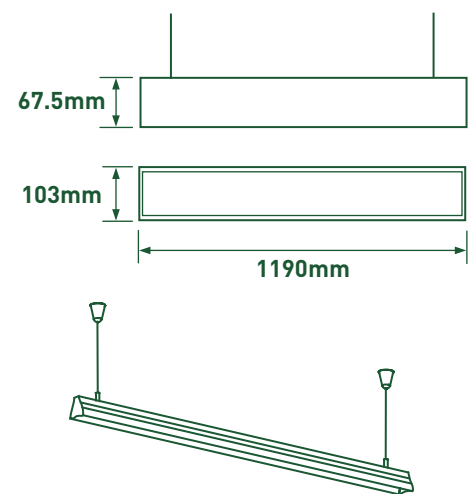

▼ Continued

Tech Help Line
UK - **0845 194 7584**
Non UK - **+44 (0)1952 238 100**


Supplied by
BG Electrical Ltd
Stafford Park 1 TF3 3BD ENGLAND

Visit our website at
www.luceco.uk

Standards

EN 60598-1	Luminaires - General requirements	EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions
EN 60598-2-1	Luminaires - Fixed	EN 62471	Photobiological safety of lamps and lamp systems
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements	2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules	2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment	(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)
EN 61547	Equipment for general lighting purposes - EMC immunity requirements		

LUCECO

 The luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

A+

The lamps cannot be changed in the luminaire.

874/2012 