


Portable Work lights LED Twin head tripod

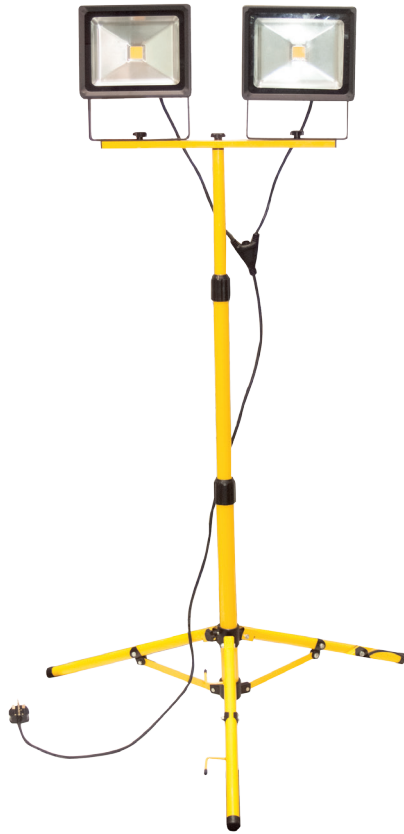

- Energy saving LED technology
- Maintenance free
- Aluminium stand, die cast housing with tempered glass
- With 4m of H05RN-F rubber cable
- Weatherproof switch on each floodlight for independant switching

[Click here for more information](#)

5000K
NEUTRAL
WHITE

30,000
HOURS

BEAM
ANGLE
95°

CRI
>80


ENERGY LABEL

енергия · енергетика

BG ELECTRICAL

A

A B C D E F G

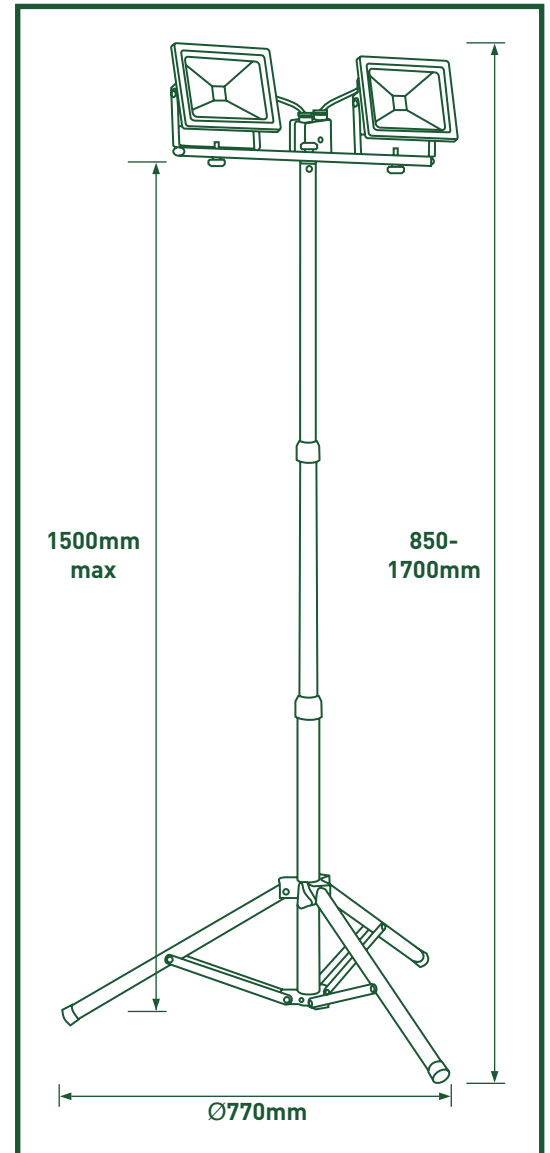

2x

Cat. No	Luminaire Lumens	Wattage	Efficacy Llm/W	Voltage	Barcode
LWT210BY4	600	10W	60	230V	5015056531755
LWT220BY4	1200	20W	60	230V	5015056531762
LWT230BY4	1800	30W	60	230V	5015056531779

Standards

EN 60598-1	Luminaires - General requirements
EN 60598-2-4	Luminaires - Portable
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)



3 year guarantee available in the UK. Rest of the world may vary, please ask your local distributor for more information.



No ingress of dust. Protected against low pressure jets of water from all directions.



RoHS



Tech Help Line
UK - **0845 194 7584**
Non UK - **+44 (0)1952 238 100**

Supplied by
BG Electrical Ltd
Stafford Park 1 TF3 3BD ENGLAND

Visit our website at

www.luceco.uk