


LED tube 2ft, 4ft, 5ft, 6ft



- Long life: 30,000 hours reducing maintenance costs
- 50% energy saving against fluorescent for similar lux levels
- Composite / Thermoplastic construction
- Integrated Constant Current driver
- Retrofit with most T8 luminaires (non-dimming)
- Eco-friendly: mercury free
- Shorted end, supplied with dummy replacement starter

Cat. No	Size	CCT	Lumens	Wattage	Efficacy lm/W
LT82N10W10	2ft	4000K	1000	10W	100
LT82C10W10	2ft	6500K	1000	10W	100
LT84N18W18	4ft	4000K	1800	18W	100
LT84C18W18	4ft	6500K	1800	18W	100
LT84N24W24	4ft	4000K	2400	24W	100
LT84C24W24	4ft	6500K	2400	24W	100
LT85N24W24	5ft	4000K	2400	24W	100
LT85C24W24	5ft	6500K	2400	24W	100
LT85N32W32	5ft	4000K	3200	32W	100
LT85C32W32	5ft	6500K	3200	32W	100
LT86N40W40	6ft	4000K	4000	40W	100
LT86C40W40	6ft	6500K	4000	40W	100

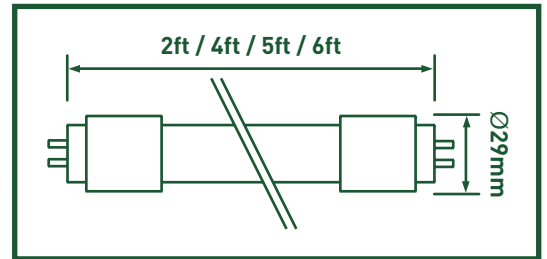

3 year guarantee available in the UK. Rest of the world may vary, please ask your local distributor for more information.



Available in 2 CCT


Type	T8
Voltage	AC 230V
Power factor	0.9
Ignition time	<0.5 sec
Start up time (95%)	<0.5 sec
Switching cycle	>30,000
Operating temperature	-20°C to 40°C



Standards

EN 62031	LED Modules for General Lighting - Safety Specifications
EN 61347-1	Lamp controlgear - Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear - Part 2-13 : Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 60588-1	Luminaires - General requirements, applicable parts only
IEC 60061	Lamp caps and holders together with gauges for the control of interchangeability and safety
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes - EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)
IEC 62776	Double-capped LED lamps for general lighting services. Safety specifications (DRAFT ONLY)

Retrofitting Instructions:

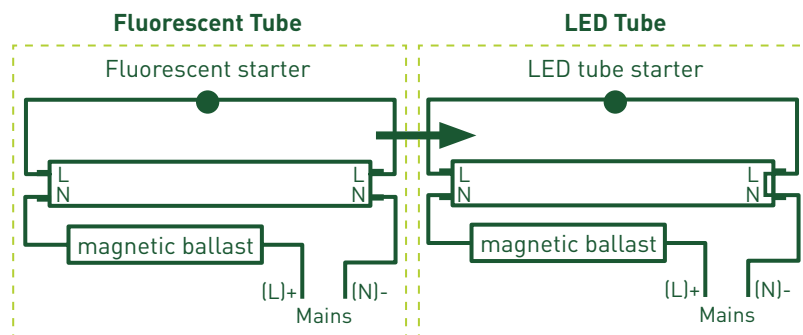

- Replacement LED starter included, for use with magnetic ballast circuits
- Retrofit also possible by removing the ballast from the circuit
- High frequency ballasts MUST be removed from the circuit and fitting rewired to suit
- Not suitable for use with dimming and emergency circuits

Tech Help Line

UK - **0845 194 7584**

Non UK - **+44 (0)1952 238 100**

Supplied by

BG Electrical Ltd

Stafford Park 1 TF3 3BD ENGLAND

Visit our website at

www.luceco.uk