


FLO Series

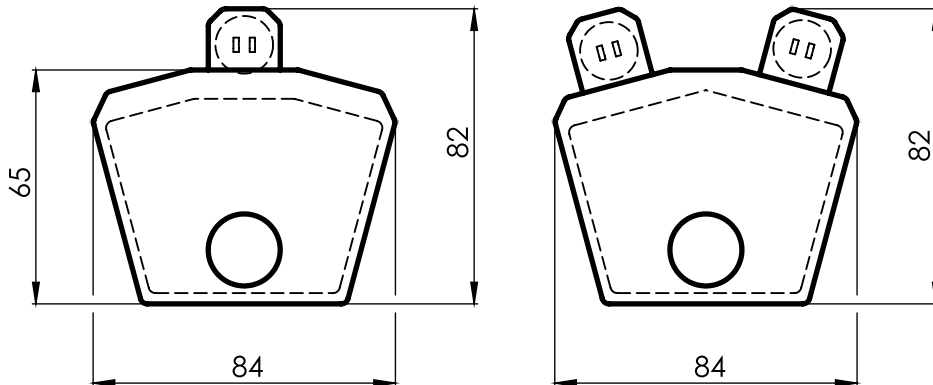

REFERENCE

LAMPS

LENGTH

FLO 15-1	1X15W	457
FLO 20-1	1X20W	612
FLO 20-2	2X20W	612
FLO 30-1	1X30W	916
FLO 30-2	2X30W	916
FLO 40-1	1X40W	1220
FLO 40-2	2X40W	1220
FLO 65-1	1X65W	1521
FLO 65-2	2X65W	1521

Ordering data & main dimensions (mm).

Single or twin tube fittings available in 450mm (18"), 600mm (2'), 900mm (3'), 1200mm (4') and 1500mm (5') nominal lengths.

Manufactured from cold rolled steel, hot dip zinc phosphated and finished in a baked, high gloss, white epoxy polyester powder coat.

Clip on top allowing quick, easy access to control gear.

Raised "dimples" on back of raceway to ensure firm ceiling mounting, and stabilize against small ceiling irregularities.

Knock-out in each end for through wiring.

Slots on sides for ventilation, and to accept clip-on reflector side wings for industrial applications.

Supply voltage 230V 50Hz.

S.A.B.S. approved.

Available in Electronic or Switch Start control gear.