


LOW BRIGHTNESS RECESSED /SURFACE MOUNT

Series

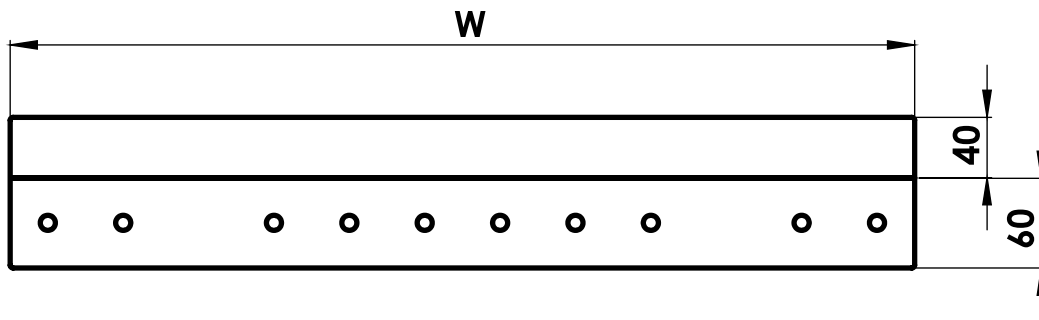

REFERENCE

LAMPS

CEILING MODULE

RECLBR 20-3	3X20W	600 X 600
RECLBR 20-4	4X20W	600 X 600
RECLBR 40-2	2X40W	1200 X 300
RECLBR 40-3	3X40W	1200 X 600
RECLBR 40-4	4X40W	1200 X 600
RECLBR 65-2	2X65W	1500 X 300
RECLBR 65-3	3X65W	1500 X 500
RECLBR 65-4	4X65W	1500 X 500

Recessed low brightness ordering data & main dimensions (mm).

REFERENCE

LAMPS

CEILING MODULE

SURFLBR 20-3	3X20W	610 X 600
SURFLBR 20-4	4X20W	610 X 600
SURFLBR 40-2	2X40W	1250 X 300
SURFLBR 40-3	3X40W	1250 X 600
SURFLBR 40-4	4X40W	1250 X 600
SURFLBR 65-2	2X65W	1550 X 300
SURFLBR 65-3	3X65W	1550 X 500
SURFLBR 65-4	4X65W	1550 X 500

Surface mounted low brightness ordering data & main dimensions (mm).

Recessed/Surface Mounted Low Brightness fitting in two, three or four tube, available in 600mm (2'), 1200mm (4') and 1500mm (5') nominal lengths.

Manufactured from cold rolled steel, hot dip zinc phosphated and finished in a baked, high gloss, white epoxy polyester powder coat.

Separate low brightness louvre has side reflectors which are manufactured in a highly polished aluminium with cross baffles in a roll formed ribbed aluminium.

The lay in low brightness louvre allows quick, easy access to control gear.

Rotating ratchet lampholders ensure that the lamps are correctly installed.

Fitting installed in exposed T-ceiling systems.

20mm Ø conduit back entry.

Supply voltage 230V 50Hz.

S.A.B.S. approved.

Available in Electronic or Switch Start control gear.

flolite

lighting manufacturers & distributors

www.flolite.co.za . sales@flolite.co.za . T: 011 394 3810 . F: 011 975 5477