


PRISMATIC RECESSED /SURFACE MOUNT Series

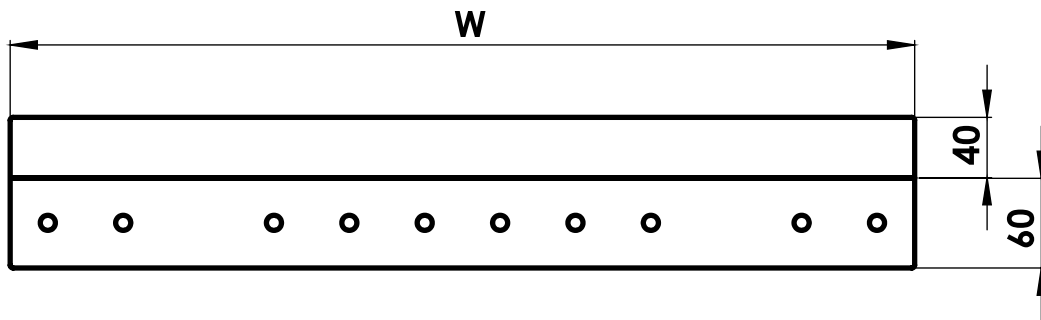

REFERENCE

LAMPS

CEILING MODULE

RECPR 20-3	3X20W	600 X 600
RECPR 20-4	4X20W	600 X 600
RECPR 40-2	2X40W	1200 X 300
RECPR 40-3	3X40W	1200 X 600
RECPR 40-4	4X40W	1200 X 600
RECPR 65-2	2X65W	1500 X 300
RECPR 65-3	3X65W	1500 X 500
RECPR 65-4	4X65W	1500 X 500

Recessed prismatic ordering data & main dimensions (mm).

REFERENCE

LAMPS

CEILING MODULE

SURFPR 20-3	3X20W	610 X 600
SURFPR 20-4	4X20W	610 X 600
SURFPR 40-2	2X40W	1250 X 300
SURFPR 40-3	3X40W	1250 X 600
SURFPR 40-4	4X40W	1250 X 600
SURFPR 65-2	2X65W	1550 X 300
SURFPR 65-3	3X65W	1550 X 500
SURFPR 65-4	4X65W	1550 X 500

Surface mounted ordering data & main dimensions (mm).

Recessed/Surface Mounted prismatic fitting in two, three or four tube, available in 600mm (2'), 1200mm (4') and 1500mm (5') nominal lengths.

Manufactured from cold rolled steel, hot dip zinc phosphated and finished in a baked, high gloss, white epoxy polyester powder coat.

Separate acrylic diffuser has raised, square-based prisms for controlled light distribution and reduction of visible glare.

The lay in prismatic diffuser allows quick, easy access to control gear.

Rotating ratchet lampholders ensure that the lamps are correctly installed.

Fitting installed in exposed T-ceiling systems.

20mm Ø conduit back entry.

Supply voltage 230V 50Hz.

S.A.B.S. approved.

Available in Electronic or Switch Start control gear.

flolite

lighting manufacturers & distributors

www.flolite.co.za . sales@flolite.co.za . T: 011 394 3810 . F: 011 975 5477