


# RL1000 FLOODLIGHT

1000 HPS ■ 1000 MH

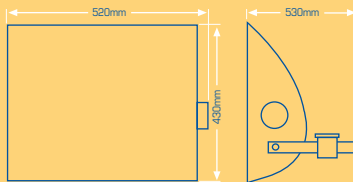

## APPLICATIONS

SECURITY  
SPORTS FIELDS  
CAR PARKS  
LARGE WORK AREAS  
DOCK, RAILWAY &  
CONTAINER YARDS  
HIGH MAST INSTALLATIONS  
**MOUNTING HEIGHT:** 12 - 40 m

- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- optional high mast stirrup
- external control gear compartment
- high purity, high performance aluminium reflector
- IP55
- universal electro-galvanised mounting stirrup with pole clamp
- **available with narrow or wide beam reflectors**

## ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL1000 <b>1000</b> HPS	8.80 A	5.50 A	21.60 KG
RL1000 <b>1000</b> MH	9.60 A	5.20 A	21.30 KG