


# RL737 FLOODLIGHT

70(l) HPS ■ 80 MV ■ 125 MV

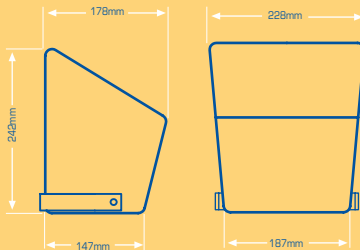

## APPLICATIONS

SECURITY  
PERIMETERS  
SIGNAGE  
SMALL HOLDINGS  
PARKS AND GARDENS  
**MOUNTING HEIGHT: 2 - 5 m**

- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- integral control gear
- high purity aluminium reflector
- wall mount electroplated stirrup
- pole clamp available
- compact
- colours: white/black
- IP65

## ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL737 <b>70(l) HPS</b>	0.72 A	0.45 A	3.44 KG
RL737 <b>80 MV</b>	0.90 A	0.45 A	2.74 KG
RL737 <b>125 MV</b>	1.35 A	0.68 A	3.14 KG