


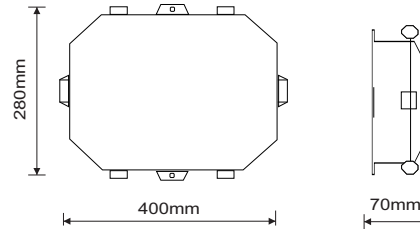


INDUSTRIAL BULKHEAD


Product details




30°



60°



90°



Wall Mount

Different Optics available

Features

- Available in different optics and wattages.
- LM2 High pressure die cast aluminium body- powder coated black.
- Stainless steel latches.
- Wall or ceiling mounted .
- Heat treated glass diffuser.

Benefits

- Energy saving.
- Long service life.
- Ingress protection rating - IP65.

Applications

Corridors & Tunnels
Conveyer belts
Canopies
Building perimeters

Warranty

3 year warranty

INDUSTRIAL BULKHEAD

Specifications

Product Code	CIB30W4K	CIB60W4K
Approx System Wattage	30W	60W
Absolute Lumens	3100lm	6133lm
Colour Temperature	4000K	4000K
CRI	≥80	≥80
Life Span	50000hrs	50000hrs
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	LM2 High pressure die cast Alum.	LM2 High pressure die cast Alum.
Packaging Weights and dimensions	440mm x 335mm x 80mm @ 5.4Kg	440mm x 335mm x 80mm @ 5.4Kg
Photometric distribution	60° - 90° - Wall mount	60° - 90° - Wall mount
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
lm/W	103lm/W	102lm/W
Suggested mounting height	3 - 5m Max	5 - 7m Max

