


LED CIRCULAR EDGELIT PANEL

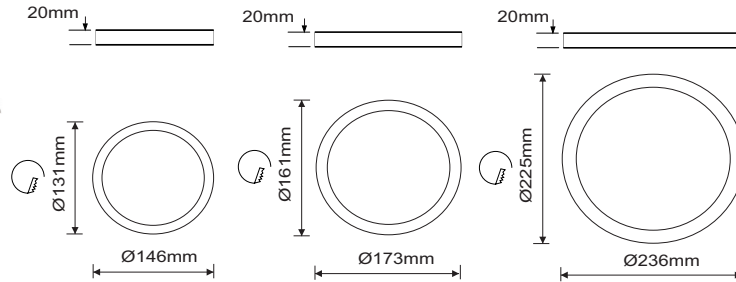

Features

- Ideal to use with lighting controls.
- Standard , emergency & dimmable options.
- The slim framed panel provides excellent luminous uniformity.
- Perfect for all retrofit or new-build applications and projects.

Benefits

- Maintenance free.
- Ingress protection rating - IP44.
- High efficiency.
- Plug and play.
- 230V/50Hz.

Applications

Interior
Offices
General areas
Education spaces

Warranty

5 year warranty

LED CIRCULAR EDGELIT PANEL

Specifications

Product Code	LP150WS48-03	LP180WS48-03	LP240WS48-03
Approx System Wattage	9W	12W	18W
Absolute Lumens	675lm	900lm	1260lm
Colour Temperature	4800K	4800K	4800K
CRI	≥80	≥80	≥80
Life Span	50000hrs	50000hrs	50000hrs
Average temp	min -20° max +35°	min -20° max +35°	min -20° max +35°
Housing Material	Aluminium frame & TPb diffuser	Aluminium frame & TPb diffuser	Aluminium frame & TPb diffuser
Packaging Weights and dimensions	175mm x 170mm x 62mm @ 0.35Kg	207mm x 205mm x 62mm @ 0.55Kg	266mm x 265mm x 65mm @ 0.85Kg
IP Rating	IP 44	IP 44	IP 44
Photometric distribution	60°	60°	60°
Power Factor	0.95	0.95	0.95
lm/W	75lm/W	75lm/W	70lm/W
Suggested mounting height	2 - 4m Max	2 - 4m Max	4- 6m Max

