



# T8 GLASS LED TUBES

## Product details

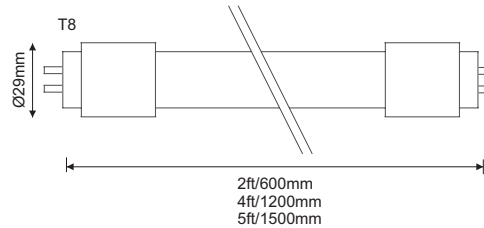

### Retrofitting Instructions:

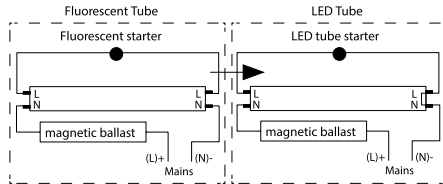

- Replacement LED starter included, for use with magnetic ballast circuits
- Retrofit also possible by removing the ballast from the circuit
- High frequency ballasts MUST be removed from the circuit and fitting re-wired to suit
- Not suitable for use with dimming and emergency circuits

## Features

- Retrofit with most T8 Luminaries (Non-dimming).
- Powered from one end ( Fitting re-wiring may be required)
- Integrated constant current driver.
- G13 Cap.
- Aluminium die casting/thermoplastic construction using the latest LED technology.

## Benefits

- 50% Energy saving against fluorescent for similar lux.
- Double lifetime.
- Shorted end, supplied with dummy replacement LED starter.
- A+ Energy rated.
- 15000 switch cycle.

## Applications

Perfect for all retrofit or new-build applications and projects.

## Warranty

3 year warranty

## T8 GLASS LED TUBES

### Specifications

Product Code	LT8G2C10W90-01	LT8G4C18W16	LT8G5C22W20-01
Approx System Wattage	10W (2ft)	18W (4ft)	22W (5ft)
Absolute Lumens	950lm	1600lm	2000lm
Colour Temperature	6500K	6500K	6500K
CRI	≥80	≥80	≥80
Life Span	30000hrs	30000hrs	30000hrs
Average temp	min -20° max +40°	min -20° max +40°	min -20° max +40°
Power Factor	0.9	0.9	0.9
lm/W	90lm/W	89lm/W	91lm/W
Base	T8	T8	T8
Photometric distribution	140°	140°	140°
Start up time	< 0.5 sec	< 0.5 sec	< 0.5 sec
Ignition time ( 95%)	< 0.5 sec	< 0.5 sec	< 0.5 sec