
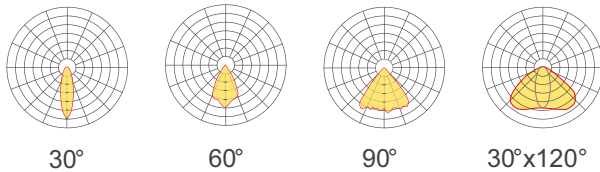


LED HIGHBAY

Product details

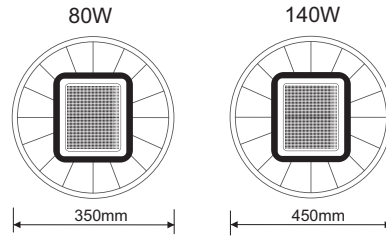

Different Optics available

Features

- Available in different optics and wattages.
- LM2 High pressure die cast aluminium body- powder coated grey.
- Separate control gear housing.
- Can be used as a floodlight.

Benefits

- Energy saving.
- Easy installation and maintenance.
- Ingress protection rating - IP65.

Applications

Production Areas
Warehouses
Open spaces
Factories
Workshops & other industrial areas

Warranty

3 year warranty

LED HIGHBAY

Specifications

Product Code	RLHB80W	RLHB140W
Approx System Wattage	80W	140W
Absolute Lumens	7200lm	13500lm
Colour Temperature	4000K	4000K
CRI	≥70	≥70
Life Span	35000hrs	35000hrs
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	LM2 High pressure die cast Alum.	LM2 High pressure die cast Alum.
Packaging Weights and dimensions	400mm x 400mm x 170mm @ 4.50Kg	500mm x 500mm x 200mm @ 8.50Kg
Photometric distribution	30°- 60°- 90°- 30°x120°	30°- 60°- 90°- 30°x120°
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
lm/W	90lm/W	96lm/W
Suggested mounting height	5 - 8m Max	8 - 12m Max

