


## LED RECESSED PANEL

### Product details

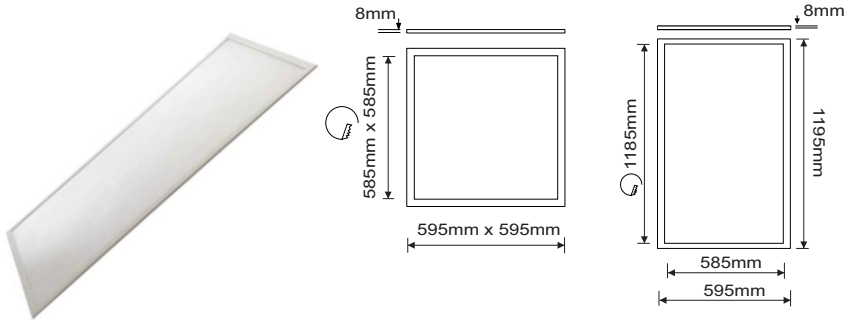

### Features

- Designed to replace existing technology in terms of size and output.
- Ideal to use with lighting controls.
- Standard , emergency & dimmable options.
- The classic LuxPanel design, with subtle white frame surround.
- Perfect for all retrofit or new-build applications and projects.

### Benefits

- Maintenance free.
- Ingress protection rating - IP44.
- High efficiency.
- Plug and play.
- 230V/50Hz.
- Surface mounting accessories available.

### Applications

Interior  
Offices  
General areas  
Education spaces

### Warranty

5year warranty

## LED RECESSED PANEL

### Specifications

Product Code	LP66W28S-05	LP612W28S-05
Approx System Wattage	25W	60W
Absolute Lumens	2800lm	5000lm
Colour Temperature	4800K	4800K
CRI	≥80	≥80
Life Span	50000hrs	50000hrs
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	White P/C Aluminium frame & TPb diffuser	White P/C Aluminium frame & TPb diffuser
Packaging Weights and dimensions	600mm x 600mm x 55mm @ 3.72Kg	1200mm x 600mm x @ 8.30Kg
Photometric distribution	60°	60°
IP Rating	IP 44	IP 44
Power Factor	0.95	0.95
lm/W	112lm/W	84lm/W
Suggested mounting height	2 - 4m Max	2 - 4m Max

