


LED LINEAR CABINET LIGHT

Product details



Door sensor - DC12V / 24V
Sensor range 50-100mm
37mm x 17mm

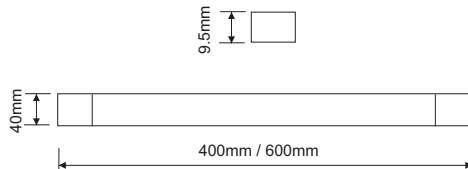

LED Driver - 24W DC12V AC110-245V
Overload, over voltage, over current,
over heating isolation and protection.
123mm x 44mm x 25mm



4 - Way splitter
Connects multiple
lights to one LED Driver

Features

- Brushed aluminium.
- Plug and play connection.
- LED driver required.

Benefits

- Single door built-in photoelectric hand scanner switch - switches light on/off automatically.
- Ingress protection rating - IP 65.

Applications

Offices
Kitchens
Decorative applications

Warranty

3 year warranty

LED LINEAR CABINET LIGHT

Specifications

Product Code	LCL400 D	LCL600 - H
Approx System Wattage	5W DC12V	9W DC12V
Absolute Lumens	250lm	450lm
Colour Temperature	2700K	4800K
CRI	≥80	≥80
Life Span	30000hrs	35000hrs
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	Brushed aluminium	Brushed aluminium
Packaging Weights and dimensions	400mm x 40mm x 9.5mm @ 0.90Kg	560mm x 40mm x 9.5mm @ 0.90Kg
Beam Angle	60°	60°
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
Lm/W	50lm/W	50lm/W