

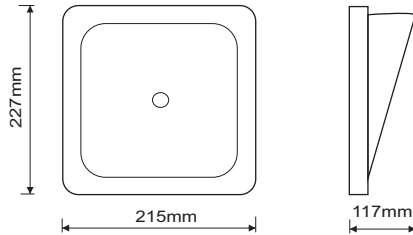


MINI FLOOD

Product details



Features

- Galvanised stirrup bracket.
- Excellent durability - Made from fibreglass.
- Wide beam reflector.

Benefits

- Housing is guaranteed for (15 years).
- Modules guaranteed for 3 years.
- Long service life.
- Ingress protection rating - IP 65.

Applications

Security perimeters
Signage
Small holdings
Parks
Gardens

Warranty

Reeflite glass reinforced polyester (GRP) housings are guaranteed for 15 years against deterioration due to ultra-violet radiation, hail damage and corrosion at coastal areas.
Modules guaranteed for 3 years.

MINI FLOOD

Specifications

Product Code	RL20WLED/WB
Approx System Wattage	20W
Absolute Lumens	1343lm
Colour Temperature	4000K
CRI	≥80
Life Span	35000hrs
Average temp	min -20° max +35°
Housing Material	Fibreglass
Packaging Weights and dimensions	225mm x 225mm x 140mm @ 1.30Kg
Photometric distribution	90°
IP Rating	IP 65
Power Factor	0.95
lm/W	68lm/W
Suggested mounting height	3 - 6m Max

