



X-RANGE Highbay

Product details

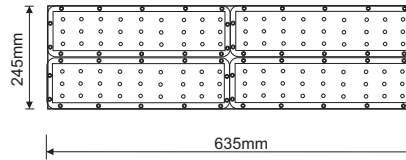

Features

- Available in different optics and wattages.
- Marine grade aluminium and highly corrosive resistant to sea and salt conditions.
- Cover mad of high impact acrylic.
- Can be used as a floodlight.

Benefits

- Energy saving.
- Easy installation and maintenance.
- Ingress protection rating - IP65.

Applications

Production Areas
Warehouses
Open spaces
Factories
Workshops & other industrial areas

Warranty

3 year warranty

X-RANGE Highbay

Specifications

Product Code	X-RANGEHB150W	X-RANGEHB200W
Approx System Wattage	150W	200W
Absolute Lumens	15700lm	21000lm
Colour Temperature	4500K	4500K
CRI	≥75	≥75
Life Span	50000hrs	50000hrs
Average temp	min -40° max -50°	min -40° max -50°
Housing Material	Aluminium 6063 and high impact acrylic cover.	Aluminium 6063 and high impact acrylic cover.
Packaging Weights and dimensions	635mm x 245mm x 50mm	635mm x 245mm x 50mm
Photometric distribution	25°	25°
IP Rating	IP 65	IP 65
Power Factor	0.97	0.97
lm/W	150lm/W	150lm/W
Suggested mounting height	5 - 8m Max	8 - 12m Max

