



CF DIE-CAST FLOODLIGHT

Product details

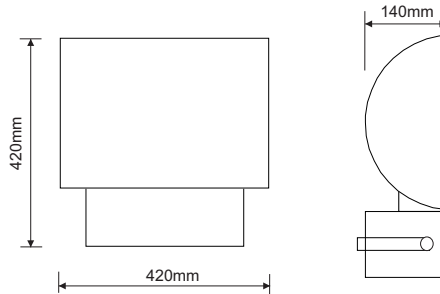

90°

Features

- Black powder coated cast aluminium housing.
- Heat tempered glass.
- Separate control gear compartment.
- High purity aluminium reflector.

Benefits

- Mild steel wall mount powder coated stirrup.
- Ingress protection rating - IP 65.
- Pole clamp available.

Applications

Security
Small sports areas
Car parks
Work areas
Illumination of buildings

Warranty

3 year warranty

CF DIE-CAST FLOODLIGHT

Specifications

| Product Code | CF250MV / CF400MV | CF250MH/HPS | CF400MH/HPS |
|----------------------------------|--|---------------------------------------|---------------------------------------|
| Approx System Wattage | (250W MV - E40) / (400W MV E40) | 250W MH/HPS - E40 | 400W MH/HPS - E40 |
| Absolute Lumens | 12700lm (250W) - 22000lm (400W) | 19000lm (MH) - 27000lm (HPS) | 35000lm (MH) - 48000lm (HPS) |
| Colour Temperature | 4800K | 4800K | 4800K |
| CRI | ≥80 | ≥80 | ≥80 |
| Life Span | TBA | TBA | TBA |
| Average temp | min -20° max +35° | min -20° max +35° | min -20° max +35° |
| Housing Material | Black powder coated cast aluminium | Black powder coated cast aluminium | Black powder coated cast aluminium |
| Packaging Weights and dimensions | 125mm x 440mm x 150mm @ 8.25Kg - 10.30Kg | 125mm x 440mm x 150mm @ 8.90Kg | 125mm x 440mm x 150mm @ 10.55Kg |
| Beam Angle | 90° | 90° | 90° |
| IP Rating | IP 65 | IP 65 | IP 65 |
| Power Factor | 0.95 | 0.95 | 0.95 |
| Starting /Running Amp | (2.60 A - 1.35 A) - (4.20 A - 2.10 A) | (2.80 A - 1.42 A) - (2.10 A - 1.42 A) | (3.80 A - 2.20 A) - (3.80 A - 2.20 A) |
| Suggested mounting height | 5 - 9m Max | 5 - 9m Max | 5 - 9m Max |