



## CIB INDUSTRIAL BULKHEAD

### Product details

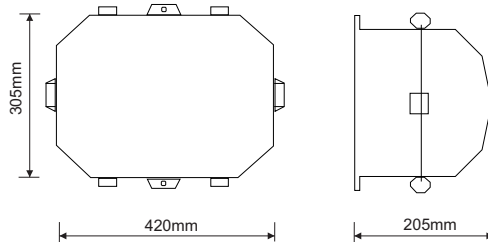

90°

### Features

- Robust powder coated cast aluminium housing.
- Borosilicate glass diffuser.
- Integral control gear.

### Benefits

- Ceiling /Wall mounted.
- Stainless steel clips.
- Ingress protection rating - IP 65.

### Applications

Tunnels  
Corridors  
Building perimeters  
Conveyors  
Canopies

### Warranty

3 year warranty

## CIB INDUSTRIAL BULKHEAD

### Specifications

Product Code	CIB80MV	CIB125MV
Approx System Wattage	80W MV - E27	125W MV - E27
Absolute Lumens	3800lm	6200lm
Colour Temperature	4800K	4800K
CRI	≥80	≥80
Life Span	TBA	TBA
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	Robust powder coated cast aluminium housing	Robust powder coated cast aluminium housing
Packaging Weights and dimensions	460mm x 350mm x 250mm @ 8.70Kg	460mm x 350mm x 250mm @ 9.0Kg
Beam Angle	90°	90°
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
Starting /Running Amp	0.90 A - 0.45 A	1.35 A - 0.68 A
Suggested mounting height	2.5 - 5m Max	2.5 - 5m Max

## CIB INDUSTRIAL BULKHEAD

### Specifications

Product Code	CIB70(I)HPS	CIB70MH
Approx System Wattage	70W HPS E27 - Internal ignitor	70W MH - E27
Absolute Lumens	6500lm	5500lm
Colour Temperature	4800K	4800K
CRI	≥80	≥80
Life Span	TBA	TBA
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	Robust powder coated cast aluminium housing	Robust powder coated cast aluminium housing
Packaging Weights and dimensions	460mm x 350mm x 250mm @ 8.70Kg	460mm x 350mm x 250mm @ 9.0Kg
Beam Angle	90°	90°
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
Starting /Running Amp	0.72 A - 0.45 A	0.72 A - 0.45 A
Suggested mounting height	2.5 - 5m Max	2.5 - 5m Max

## CIB INDUSTRIAL BULKHEAD

### Specifications

Product Code	CIB150HPS	CIB150MH
Approx System Wattage	150W HPS - E40	150W MH - E40
Absolute Lumens	14000lm	12500lm
Colour Temperature	4800K	4800K
CRI	≥80	≥80
Life Span	TBA	TBA
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	Robust powder coated cast aluminium housing	Robust powder coated cast aluminium housing
Packaging Weights and dimensions	460mm x 350mm x 250mm @ 10.0Kg	460mm x 350mm x 250mm @ 10.50Kg
Beam Angle	90°	90°
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
Starting /Running Amp	1.30 A - 0.88 A	1.70 A - 0.82 A
Suggested mounting height	2.5 - 5m Max	2.5 - 5m Max