


LUNA BULKHEAD

Product details

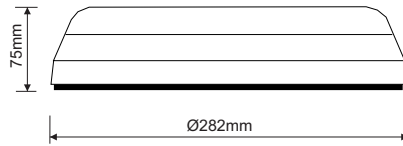

Features

- Polycarbonate base.
- Clear or opal polycarbonate diffuser.
- Integral control gear.
- Photocell option.

Benefits

- Ceiling /Wall mounted.
- Polycarbonate outer ring in white, black or green.
- Indoor or outdoor use.
- Ingress protection rating - IP 55.

Applications

Corridors
Entrances & exits
Commercial buildings
Domestic
Staircases
Hospitals & schools

Warranty

3 year warranty

LUNA BULKHEAD

Specifications

Product Code	MBLUNA109WWO	MBLUNA209W/1WO	MBLUNA16W2DWO
Approx System Wattage	9W - 2 PIN	2x9W - 2 PIN	16W 2D - 2PIN
Absolute Lumens	600lm	1200lm	1100lm
Colour Temperature	4800K	4800K	4800K
CRI	≥80	≥80	≥80
Life Span	TBA	TBA	TBA
Average temp	min -20° max +35°	min -20° max +35°	min -20° max +35°
Housing Material	Polycarbonate base, opal or clear diffuser	Polycarbonate base, opal or clear diffuser	Polycarbonate base, opal or clear diffuser
Packaging Weights and dimensions	282mm x 63mm x 282mm @ 1.29Kg	282mm x 63mm x 282mm @ 1.30Kg	282mm x 110mm x 282mm @ 1.14Kg
Beam Angle	90°	90°	90°
IP Rating	IP 55	IP 55	IP 55
Power Factor	0.95	0.95	0.95
Lamp	2Pin PL lamp - 0.06 A	2 x 2Pin PL lamp - 0.12 A	2D - 2PIN
Suggested mounting height	2.5 - 5m Max	2.5 - 5m Max	2.5 - 5m Max