


RL223 MINI FLOOD

Product details

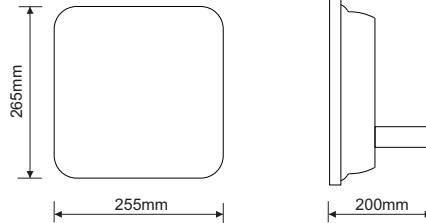

Features

- Corrosion resistant glass reinforced polyester housing.
- Heat tempered glass.

Benefits

- High purity aluminium reflector.
- Wall mount electroplated stirrup.
- Ingress protection rating - IP 55.

Applications

Security
Perimeters
Signage
Gardens

Warranty

Reeflite glass reinforced polyester (GRP) housings are guaranteed for 15 years against deterioration due to ultra-violet radiation, hail damage and corrosion at coastal areas.

RL223 MINI FLOOD

Specifications

Product Code	RL223CFL
Approx System Wattage	23W CFL - E27
Absolute Lumens	1450lm
Colour Temperature	4000K
CRI	≥80
Life Span	TBA
Average temp	min -20° max +35°
Housing Material	Fibreglass
Packaging Weights and dimensions	260mm x 120mm x 268mm @ 1.65Kg
Beam Angle	60°
IP Rating	IP 55
Power Factor	0.95
Starting /Running Amp	CFL
Suggested mounting height	2 - 3m Max