



RL303 FLOODLIGHT

Product details

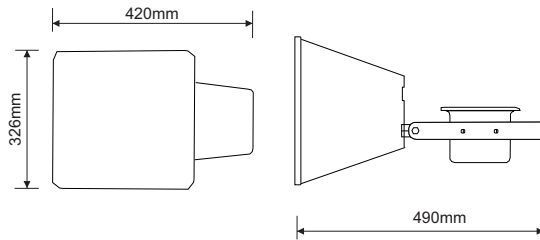

Features

- Corrosion resistant glass reinforced polyester housing.
- Heat tempered glass.
- External control gear compartment.
- High purity aluminium reflector.

Benefits

- Universal electroplated mounting stirrup with pole clamp.
- Ingress protection rating - IP 65.

Applications

Security
Signage
Work areas
Illumination of buildings

Warranty

Reeflite glass reinforced polyester (GRP) housings are guaranteed for 15 years against deterioration due to ultra-violet radiation, hail damage and corrosion at coastal areas.

RL303 FLOODLIGHT

Specifications

Product Code	RL303250MV	RL303400MV
Approx System Wattage	250W MV - E40	400W MV - E40
Absolute Lumens	12700lm	22000lm
Colour Temperature	4800K	4800K
CRI	≥70	≥70
Life Span	TBA	TBA
Average temp	min -20° max +35°	min -20° max +35°
Housing Material	Fibreglass	Fibreglass
Packaging Weights and dimensions	490mm x 438mm x 270mm @ 8.44Kg	490mm x 438mm x 270mm @ 9.74Kg
Beam Angle	90°	90°
IP Rating	IP 65	IP 65
Power Factor	0.95	0.95
Starting /Running Amp	2.60 A - 1.35 A	4.20 A - 2.10 A
Suggested mounting height	4 - 7m Max	4 - 7m Max