



RL737 MINI FLOODLIGHT

Product details

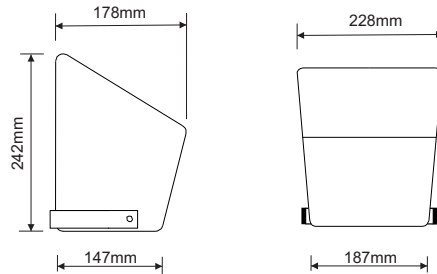

Features

- Corrosion resistant glass reinforced polyester housing.
- Heat tempered glass.
- Integral control gear.
- High purity aluminium reflector.

Benefits

- Wall mount electroplated stirrup.
- Ingress protection rating - IP 65.
- Pole clamp available.
- Black or white color options.
- Compact

Applications

Security
Perimeters
Signage
Small holdings
Parks & Gardens

Warranty

Reeflite glass reinforced polyester (GRP) housings are guaranteed for 15 years against deterioration due to ultra-violet radiation, hail damage and corrosion at coastal areas.

RL737 MINI FLOODLIGHT

Specifications

| Product Code | RL73770(I)HPS | RL73780MV | RL737125MV |
|----------------------------------|-------------------------------------|--------------------------------|--------------------------------|
| Approx System Wattage | 70w E27 Elliptical Internal Ignitor | 80w E27 Elliptical | 125w E27 Elliptical |
| Absolute Lumens | 5600lm | 3800lm | 6200lm |
| Colour Temperature | 4000K | 4000K | 4000K |
| CRI | ≥80 | ≥80 | > 70 |
| Life Span | TBA | TBA | TBA |
| Average temp | min -20° max +35° | min -20° max +35° | min -20° max +35° |
| Housing Material | Fibreglass | Fibreglass | Fibreglass |
| Packaging Weights and dimensions | 268mm x 249mm x 210mm @ 3.44Kg | 268mm x 249mm x 210mm @ 2.74Kg | 268mm x 249mm x 210mm @ 3.14Kg |
| Beam Angle | 90° | 90° | 90° |
| IP Rating | IP 65 | IP 65 | IP 65 |
| Power Factor | 0.95 | 0.95 | 0.95 |
| Starting /Running Amp | 0.72 A - 0.45 A | 0.90 A - 0.45 A | 1.35 A - 0.68 A |
| Suggested mounting height | 2 - 5m Max | 2 - 5m Max | 2 - 5m Max |