


## UFO BULKHEAD

### Product details

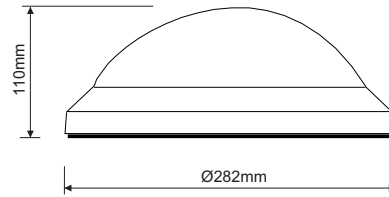

### Features

- Polycarbonate base.
- Clear or opal polycarbonate diffuser.
- Integral control gear.
- Photocell option.

### Benefits

- Ceiling /Wall mounted.
- Polycarbonate outer ring in white, black or green.
- Indoor or outdoor use.
- Ingress protection rating - IP 55.

### Applications

Corridors  
Entrances & exits  
Commercial buildings  
Domestic  
Staircases  
Hospitals & schools

### Warranty

3 year warranty

## UFO BULKHEAD

### Specifications

Product Code	MBUFO109WP / MBUFO209WP	MBUFO60/100ESWO	MBUFO16W2DWO
Approx System Wattage	(9W - 2 PIN) (2x9W - 2 PIN)	60W - ES	16W 2D - 2PIN
Absolute Lumens	600lm - 1200lm	710lm	1100lm
Colour Temperature	4800K	4800K	4800K
CRI	≥80	>80	≥80
Life Span	TBA	TBA	TBA
Average temp	min -20° max +35°	min -20° max +35°	min -20° max +35°
Housing Material	Polycarbonate base, opal or clear diffuser	Polycarbonate base, opal or clear diffuser	Polycarbonate base, opal or clear diffuser
Packaging Weights and dimensions	282mm x 110mm x 282mm @ 1.14Kg	282mm x 110mm x 282mm @ 0.85Kg	282mm x 110mm x 282mm @ 1.14Kg
Beam Angle	90°	90°	90°
IP Rating	IP 55	IP 55	IP 55
Power Factor	0.95	0.95	0.95
Lamp	2Pin PL lamp - (0.06 A - 012A)	60W incandescent	2D - 2PIN
Suggested mounting height	2.5 - 5m Max	2.5 - 5m Max	2.5 - 5m Max