


RL1000 FLOODLIGHT

1000 HPS ■ 1000 MH

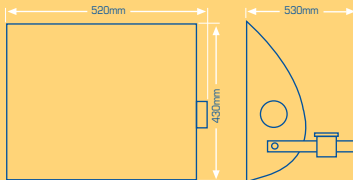

APPLICATIONS

SECURITY
SPORTS FIELDS
CAR PARKS
LARGE WORK AREAS
DOCK, RAILWAY &
CONTAINER YARDS
HIGH MAST INSTALLATIONS
MOUNTING HEIGHT: 12 - 40 m

- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- optional high mast stirrup
- external control gear compartment
- high purity, high performance aluminium reflector
- IP55
- universal electroplated mounting stirrup with pole clamp
- **available with narrow or wide beam reflectors**

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL1000 1000 HPS	8.80 A	5.50 A	21.60 KG
RL1000 1000 MH	9.60 A	5.20 A	21.30 KG