


RL303 CFL FLOODLIGHT

85 CFL ■ 105 CFL

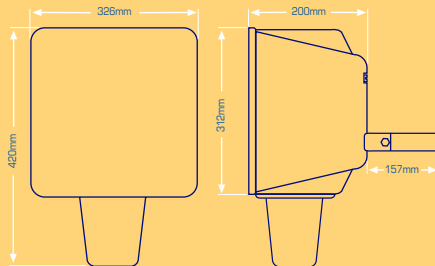

APPLICATIONS

SECURITY
SIGNAGE
WORK AREAS
ILLUMINATION OF BUILDINGS

MOUNTING HEIGHT: 3 - 5 m

- corrosion resistant glass reinforced polyester housing
- heat tempered glass
- high purity aluminium reflector
- universal electroplated galvanised mounting stirrup with pole clamp
- IP55
- colours: white/black

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL303 CFL 85 W	0.6 A	0.38 A	3.5 KG
RL303 CFL 105 W	0.9 A	0.44 A	3.5 KG