



RL606 LOWBAY



250 MV ■ 400 MV ■ 250 HPS ■ 400 HPS ■ 250 MH ■ 400 MH

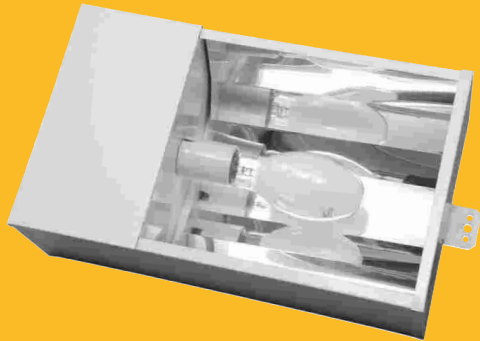

APPLICATIONS

WAREHOUSES
FOUNDRIES
FACTORIES
WORKSHOPS
GARAGE CANOPIES

- powder coated mild steel control gear housing
- high purity aluminium reflector
- mounting brackets
- integral control gear
- **glass cover available**

ORDERING DATA

CODE	CORRECTED LINE CURRENT		WEIGHT
	STARTING	RUNNING	
RL606 250 MV	2.60 A	1.35 A	7.00 KG
RL606 400 MV	4.20 A	2.10 A	8.00 KG
RL606 250 HPS	2.10 A	1.42 A	7.65 KG
RL606 400 HPS	3.80 A	2.20 A	9.55 KG
RL606 250 MH	2.80 A	1.42 A	7.65 KG
RL606 400 MH	3.80 A	2.20 A	9.55 KG